




# Palm Centro Speakers Replacement

Written By: Kevin

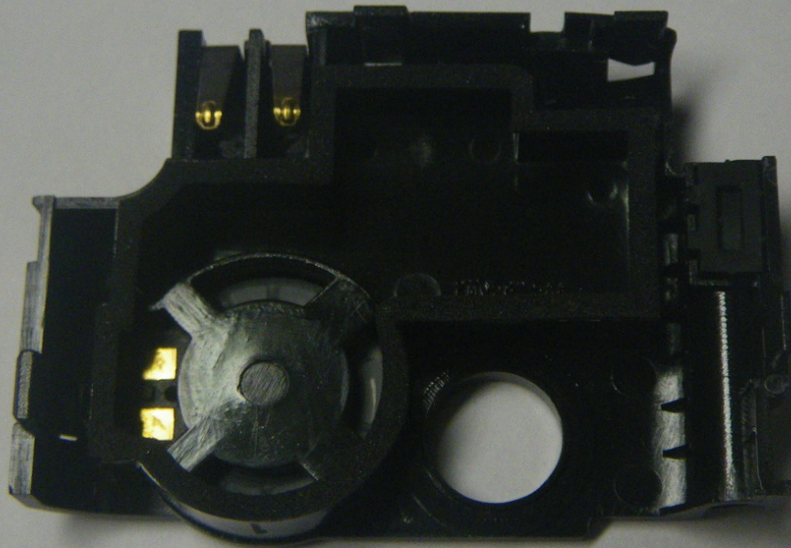

## INTRODUCTION

This guide show you how to remove and replace the Palm Centro's speakers

---



### TOOLS:

- [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-




## Step 1 — Disassembling Palm Centro Battery



- Press and slide open the battery cover.

## Step 2



 **Caution:** Turn cell phone off before removing battery!

- Press battery to the right.
- Then lift up battery pack to remove.

## Step 3



- Phone with battery removed

## Step 4 — Back Housing



- Remove the touchpad pen from the top left corner on the back to reveal the last of 6 screws to be removed.



## Step 5



- Lift the rubber cap at the top right to reveal the sixth screw.

⚠ Caution: There is a small Palm sticker under the rubber cap. Tampering with or removing this sticker will void your warranty!

- Remove the six screws using the T5 Torx screwdriver.

## Step 6




- Remove the SIM card so housing can be separated.

## Step 7



- Use a plastic pry tool to separate the bottom of the case to remove the small plastic insert.

## Step 8

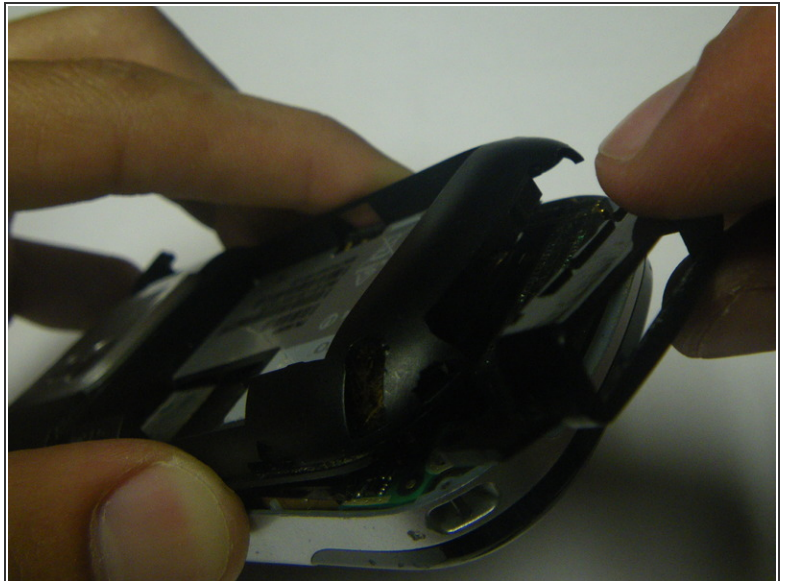

- Remove the small plastic insert at the bottom of the phone.



## Step 9




- Continue with plastic pry tool all the way around the phone to remove the back housing.

## Step 10 — Logic Board




- Carefully peel back the tape holding the speaker (left) and keyboard (right) connection tabs in place.

## Step 11

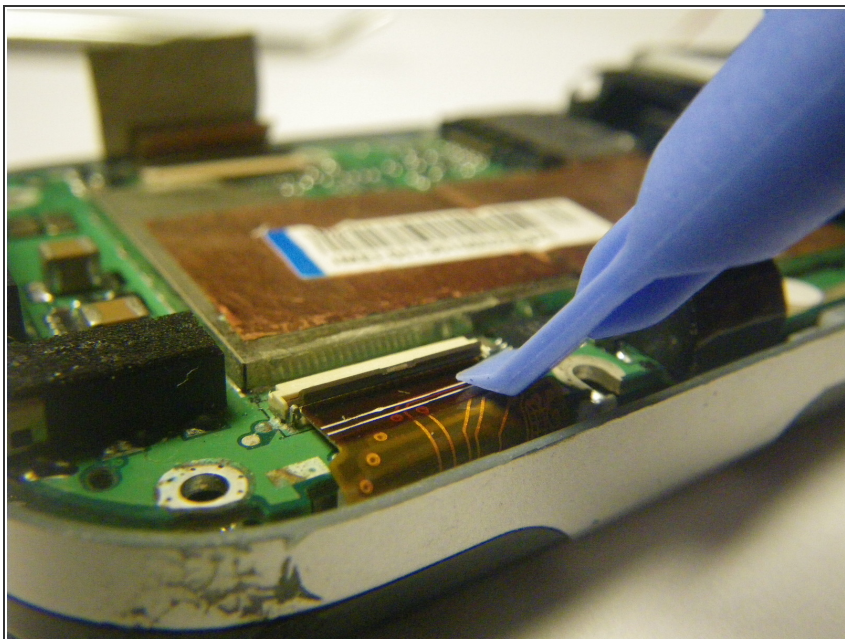

- Using the plastic prying tool, lift the tabs and carefully pull the contact connections out on both sides.
- ⚠ Be very careful, these electronics are delicate!


## Step 12

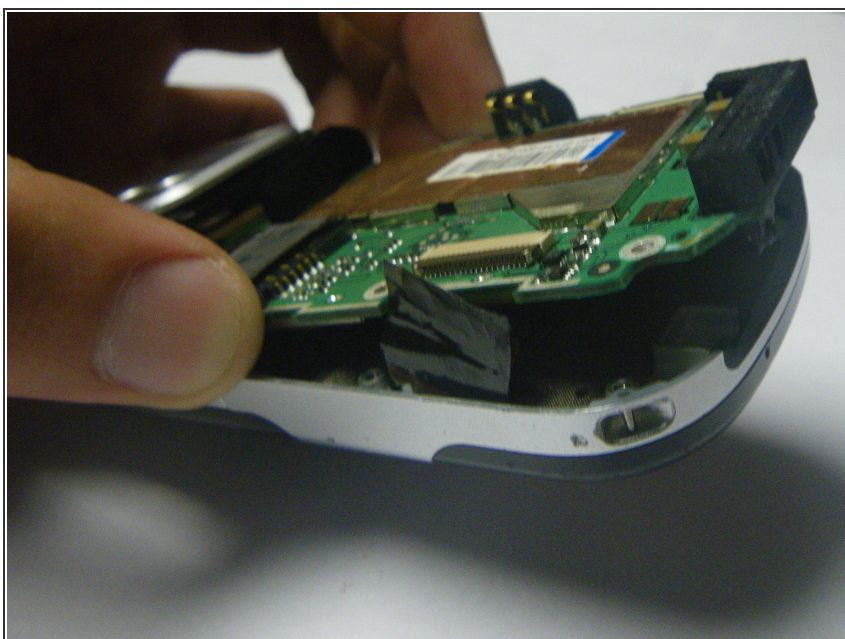

- Separate the logic board from the case by lifting and pulling out the bottom.



## Step 13 — Speakers

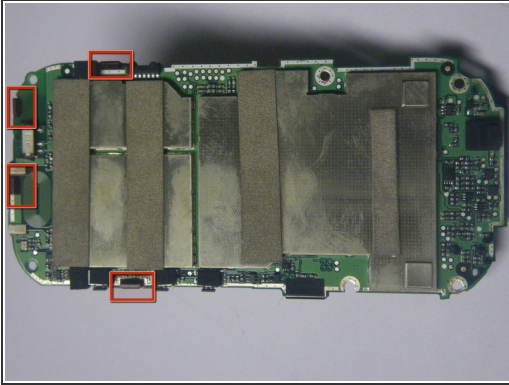


- Pry the four plastic latches free that connect the antenna to the logic board.

⚠ Excessive force may damage your logic board!

- Remove the antenna from the logic board.

## Step 14

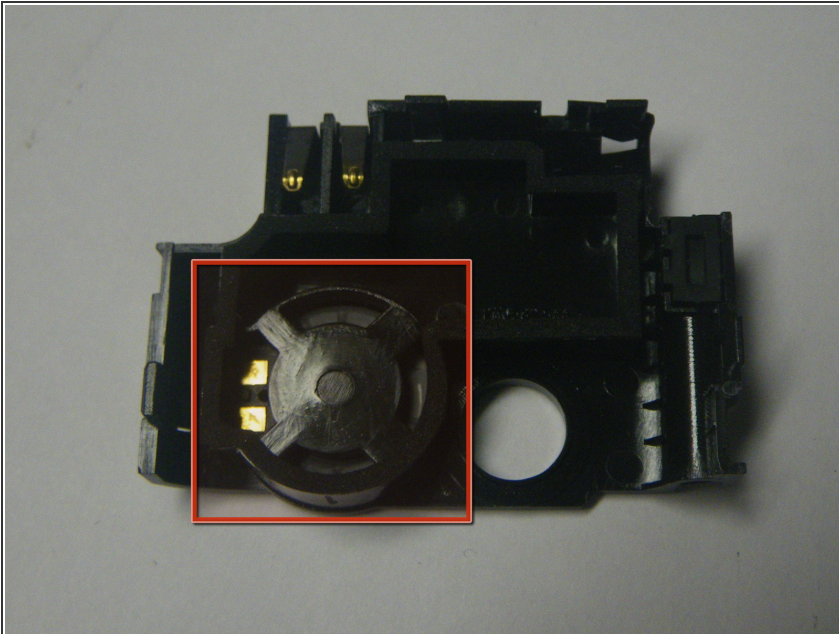

- The internal speaker is attached to the antenna. To remove it, pry the speaker from the antenna using the tip of your screwdriver.

**i** The speaker should be placed back into its spot in the correct position. Take notice of the gold connectors

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-07 12:03:11 AM.